

BarnDoorTrack™

CS BarnDoorTrack™ is a traditionally styled sliding door track system suitable for internal applications where there is enough strength in the wall to side mount a track above an opening.

The track is pre-finished black anodised and supplied with fixing bracket, stops, door hangers and T-Guide.

Traditional style
barn door track
engineered for
smooth running
heavy doors.

This system has been
engineered for quick, easy
installation and smooth
running for heavy doors.



↑ 3 - CS Barn Door Track
with painted timber door.



↑ 1 - CS Barn Door Track & Hangers



↑ 2 - CS Barn Door Track with white painted timber door.

Another quality product from:


 FOR DOORS

Technical Information

How to specify (example)

Product:	~ CS BarnDoorTrack by CS FOR DOORS
Location:	~ Living Room
Door type:	~ CS AluTec
Door leaf dimensions:	~ 2400 x 1200mm
Single or Bi-Parting:	~ Single
Door finish:	~ Matt Black Powder coat
Track length:	~ 2400mm
Track bracket:	~ Wide
Handle type:	~ CaviLock CL400 Passage

Fixing Detail

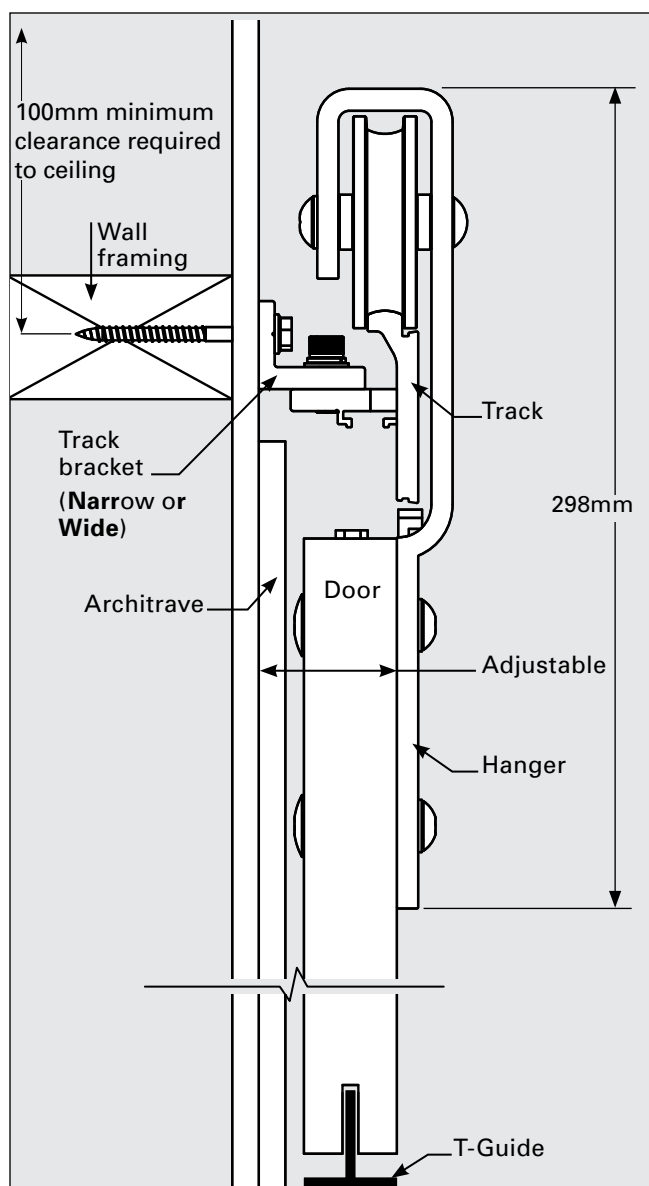

Design Features & Options

- Track bracket is adjustable to allow for different door and architrave thickness.
- Track is high-quality, heavy duty extruded aluminium with black anodised finish.
- Ultra smooth running acetal wheels.
- Anti-jump system ensures door cannot jump off the track.
- SofStop® option available late 2017.
- Pre-machined mounting holes for easy installation.
- Minimum door thickness: 32mm.
- Maximum weight: SofStop: 100kg (per door) Standard: 300kg (per track).
- Tracks stocked in standard lengths or can be cut to order. Maximum custom length: 6m. Lead time applies.

Installation Notes


There must be enough strength in the wall to mount a track above the doorway. The stud wall must be level and solid enough to support the door weight.

This track is supplied with coach screws suitable for use with timber framing. For fixing to concrete walls, masonry anchors must be used.

Determine overall thickness

This track system is supplied with either a Narrow or Wide track bracket which must be specified at time of order. The bracket can be adjusted to suit an overall thickness of door + gap + architrave of:

40 - 61mm (Narrow option) or 62 - 80mm (Wide option).

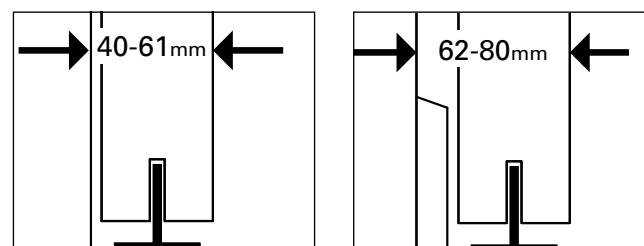

Door Options

Suitable for hanging large, heavy feature doors (32-50mm thick). Supply your own or choose from our pre-finished aluminium **CS DoorLeaves** range.

CS NewYorker ➔



Drawings are not to scale. All dimensions in mm.



CS FOR DOORS NZ
0800 754 337



www.csfordoors.co.nz
info@csfordoors.co.nz



www.cavitysliders.com.au
info@cavitysliders.com.au



CS Cavity Sliders Pty Ltd
Australia
1300 975 433